




Pass

Test Time : 18.4.2019 10:04:15
Project : Video Trade
Profile : Certifier
Operator : Default
Cable Type / NVP : CAT 6A FTP , 68%
Connector : CAT6A

Limit : ISO - Class EA Link PL1 PL2 CP1
Model : TestPro CV100
Serial Number : Main: 5200-1013, Remote: 5200-1014
Device Software : 2.2.R12
Calibration Date : 22. června 2018
Main Adapter : PROBE CAT 6A LINK
Remote Adapter : PROBE CAT 6A LINK

Parameter	Result	Pair	Value	Limit
Length(m)	Info	36	18,9	100,0
Prop Delay(ns)	Pass	12	95,0	496,0
Delay Skew(ns)	Pass	12	3,0	43,0
Loop Resistance(Ω)	Pass	36	4,071	17,900
Res. Unbal, pair-pair(Ω)	Info	36-45	0,097	0,265
Res. Unbal, wire-wire(Ω)	Info	36	0,155	0,200

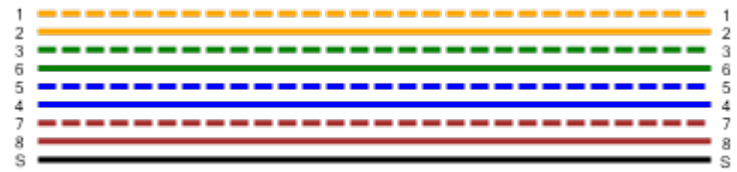


T568B


RF Parameters

Parameter	Result	Main							Remote						
		Worst Margin				Worst Value			Worst Margin				Worst Value		
		Pair	Margin (dB)	Limit (dB)	Freq (MHz)	Pair	Value (dB)	Freq (MHz)	Pair	Margin (dB)	Limit (dB)	Freq (MHz)	Pair	Value (dB)	Freq (MHz)
Return Loss	Pass	45	6,9	8,0	481,00	45	14,8	482,00	45	5,9	8,0	492,00	45	13,9	492,00
Insertion Loss	Pass	12	3,1	4,0	5,20	45	8,3	486,00	-	-	-	-	-	-	-
NEXT	Pass	36-45	3,7	28,9	478,00	36-45	32,6	479,00	36-45	4,2	29,2	472,00	36-45	33,2	484,00
PSNEXT	Pass	36	4,0	26,0	479,00	36	30,0	479,00	36	4,2	27,6	443,00	36	30,2	485,00
ACRF	Pass	36-45	11,8	57,2	2,50	12-45	27,9	466,00	36-45	12,4	52,4	4,30	45-12	28,0	468,00
PSACRF	Pass	45	11,5	54,9	2,35	45	26,9	468,00	45	12,0	51,6	3,40	45	26,5	426,00
TCL	Info														
TCTL	Info														
ACRN	Pass	12-36	29,3	20,0	128,00	36-45	24,5	479,00	36-78	30,3	20,3	126,50	36-45	24,8	485,00
PSACRN	Pass	36	29,3	16,9	132,50	36	22,2	479,00	36	28,9	17,7	126,50	36	22,4	484,00


Insertion Loss

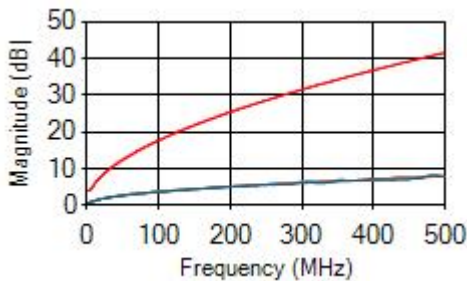


Return Loss

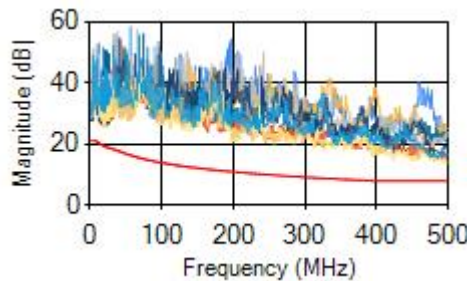


NEXT

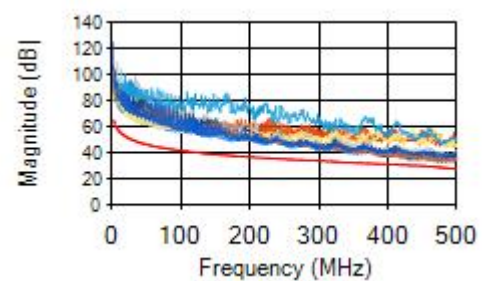


TCL

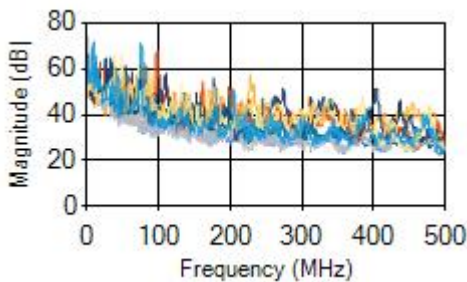

ACRF

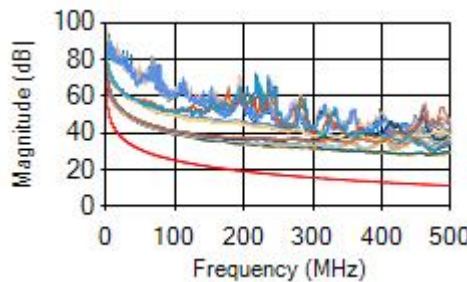

ACRN

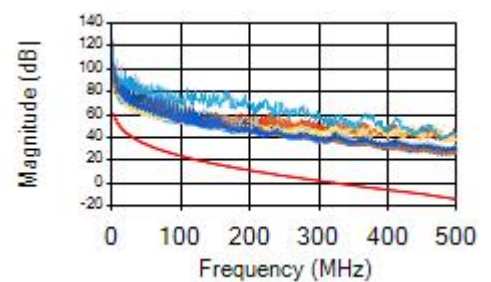

10BASE-T, 100BASE-T, 1000BASE-T, 2.5GBASE-T, 5GBASE-T, 10GBASE-T